



FPGWORLD.COM

INLINE

4000 SERIES 1200 FREESTANDING/SQUARE HEATED

| | | |
|--------------|------------------------|--------------------------|
| RANGE | INLINE 4000 SERIES | |
| TEMPERATURE | HEATED | |
| MODEL | IN-4H12-SQ-FF-FS | IN-4H12-SQ-SD-FS |
| FRONT | SQUARE/ FIXED FRONT | SQUARE/ SLIDING DOORS |
| INSTALLATION | FREESTANDING | |
| HEIGHT | 1405mm | |
| WIDTH | 1203mm | |
| DEPTH | 778mm | |

| | |
|--------------------------------------|---------------|
| TEMPERATURE RANGE | +55°C - +95°C |
| RECOMMENDED CORE PRODUCT TEMPERATURE | +65°C - +80°C |
| ENVIRONMENTAL TEST CONDITIONS | 22°C / 65% RH |

FEATURES

- High energy efficiency: 1.66 kWh per hour (average)**
- Cabinet operating temperature range +55°C - +95°C**
Recommended core product temperature +65°C - +80°C
 - Smart display with toughened safety glass encased in brushed stainless steel frame

Fixed Front or Sliding Doors Heated Display

- Three tiltable, height-adjustable stainless steel wire rack shelves are full cabinet width to support maximum display capacity
- 25,000 hour LED lighting system at 2758 lumens per metre in cabinet top and shelves
 - Unique shelf mounted ticket strip front and rear: 30mm
 - Integrated ambient rear storage area

Operational Excellence

- Sliding doors (staff side) and fixed front or sliding doors options (customer side)
- Constructed from stainless and mild steel with toughened safety glass and double-glazed end panels for maximum energy efficiency, climate control and durability
- Low-wattage, high-density element provides even temperature distribution
 - Fitted with adjustable 150mm legs (+30mm adjustment)



Showing : Inline 4000 Series heated 1200mm square freestanding with fixed front

OPTIONS & ACCESSORIES

Contact a [FPG Sales Representative](#) for our full range, including:

- Shelf trays: Toughened safety glass, stainless or mild steel. Colour and woodprint options available for steel shelf trays
- Stainless steel product trays with sides
- Stainless steel pie chutes
- Additional shelf
- Branded decals
- Rear door or end glass mirror application
- Adjustable 100mm legs (+25mm adjustment), lockable castors or unidirectional rollers
- Forward-facing controls
- Chassis configured for joinery installation
- Rear deck assemblies
- Thermal divider panels
- Custom joinery solution



Please contact FPG to discuss your requirements for meeting country-specific standards.

FPGWORLD.COM

HEATED DATA

| MODEL | TEMPERATURE RANGE | RECOMMENDED CORE PRODUCT TEMPERATURE | ENVIRONMENTAL TEST CONDITIONS | HEATING |
|------------------|-------------------|--------------------------------------|-------------------------------|-----------------------------------|
| IN-4H12-SQ-XX-FS | +55°C – +95°C | +65°C – +80°C | 22°C / 65% RH | Low-wattage, high-density element |

ELECTRICAL DATA

| MODEL | VOLTAGE | PHASE | CURRENT | E24H (kWh) | kWh per hour (average) | IP RATING | MAINS | | LED LIGHTING | | |
|------------------|-----------|--------|---------|------------|------------------------|-----------|-----------------------|------------------------------|--------------|------------------|---------|
| | | | | | | | CONNECTION | CONNECTION PLUG ¹ | HOURS | LUMENS per metre | COLOUR |
| IN-4H12-SQ-XX-FS | 220-240 V | Single | 7.2 A | 39.8 | 1.66 | IP 20 | 3 metre, 3 core cable | 10 amp, 3 pin plug | 25,000 | 2758 per metre | Natural |

¹Please advise country to change plug specification.

CAPACITY, ACCESS & CONSTRUCTION

| MODEL | DISPLAY AREA | LEVELS | ACCESS FRONT | ACCESS REAR | CHASSIS CONSTRUCTION |
|------------------|--------------------|-----------|---------------|---------------|------------------------------|
| IN-4H12-SQ-FF-FS | 1.5 m ² | 3 Shelves | Fixed front | Sliding doors | Stainless 304 and mild steel |
| IN-4H12-SQ-SD-FS | 1.5 m ² | 3 Shelves | Sliding doors | Sliding doors | Stainless 304 and mild steel |

DIMENSIONS


| MODEL | H x W x D mm (Uncrated) | MASS (Uncrated) |
|------------------|-------------------------|-----------------|
| IN-4H12-SQ-XX-FS | 1405 x 1203 x 778 | 170 kg |

Crated weights and dimensions vary. Please contact us for information on your shipment.

Installation note:

Model cutout dimensions: IN-4H12-SQ-XX-FS models require 1175 x 755mm benchtop cutout. Joinery height 560mm (see product manual for installation guide).

Please contact FPG to configure this freestanding cabinet for joinery installation option.

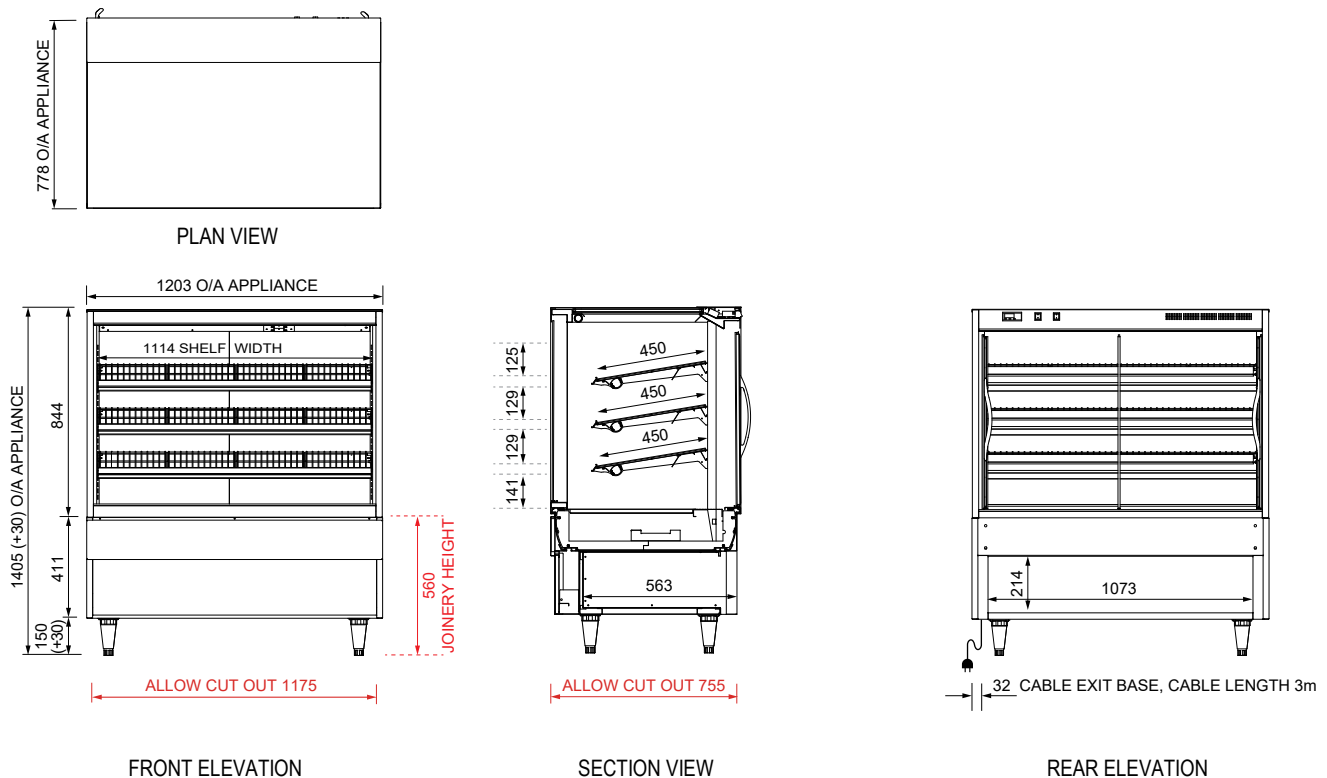

More information including technical data and installation guidelines is available from the Product Manual published on our website.

In line with our policy to continually develop, improve and support our products, Future Products Group Ltd reserves the right to change specifications and design without notice.

Have a question? Please email us at sales@fpgworld.com or visit www.fpgworld.com for full contact details for your region.

